



FADE

Fade reflects the inherent beauty in the steady passing of time, expressed in a gentle transition from one state to another. On one side, its highly textured design stands out crisply, but softly fades as it travels across the stone, relaxing into smooth natural stone on the other. Part of the Phases collection by stone artist and designer Ruchika Grover, Fade showcases the organic allure of natural stone and depth created through texture. Fade is stocked as 4"x12" tiles in Coral Pink and Green Serpentine.

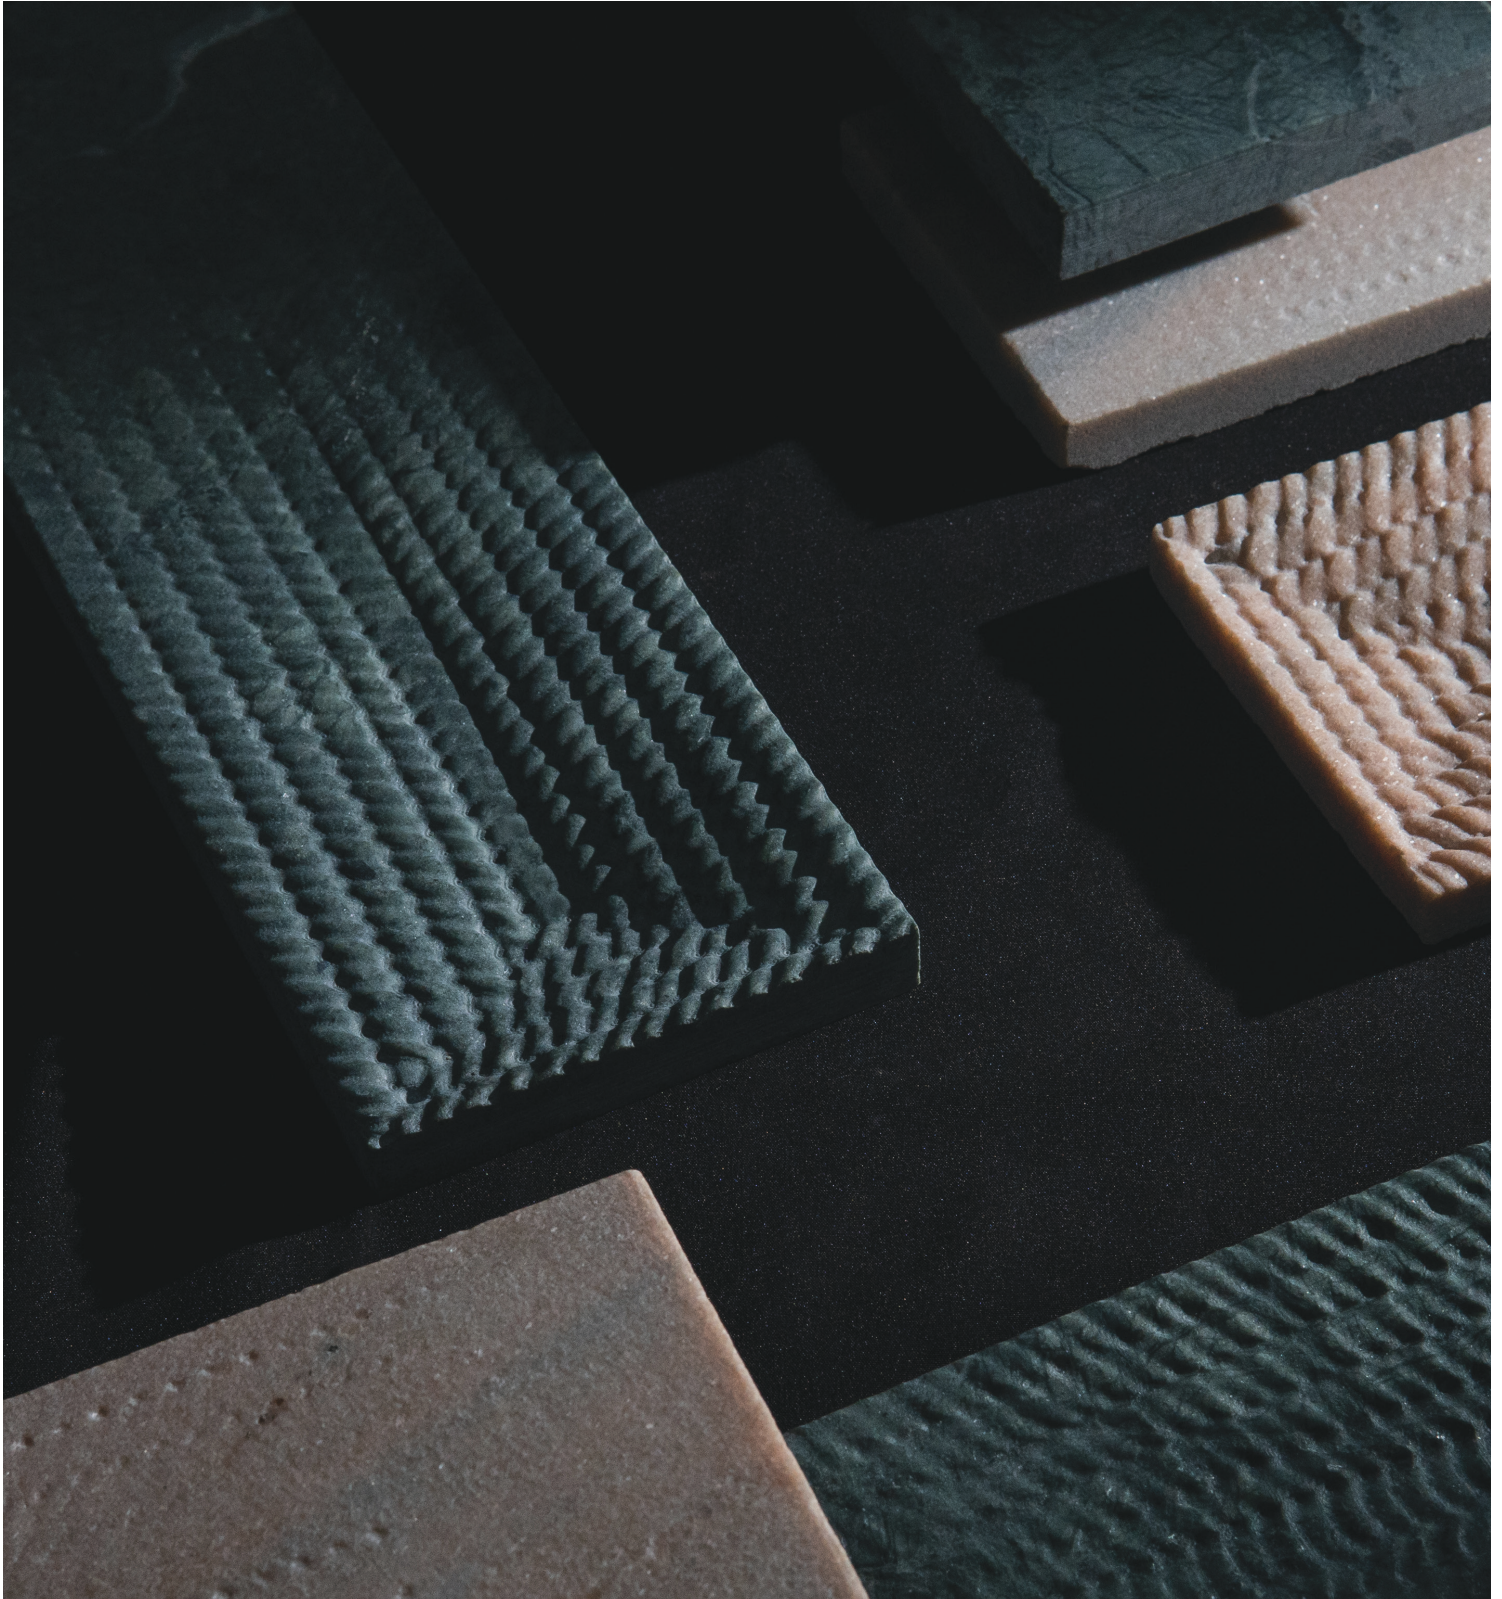


FADE

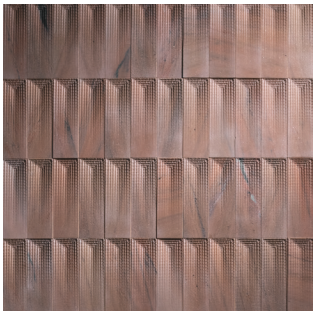

Coral Pink



Green Serpentine

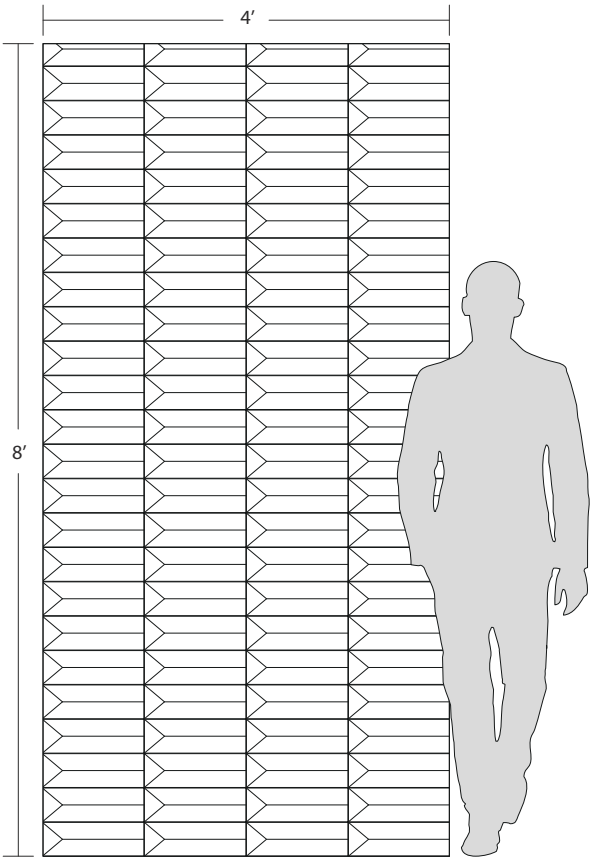

APPLICATIONS									VARIATION				TAILORED TO CUSTOMIZATION				
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4	CARPET CUTTING	FIELD	FINISH	MOSAIC	SADDLE	VANITY TOP	WATERJET	
No	All	Yes, including steam	No	No	Yes, non-freeze thaw	No	No	Yes									
INSTALLATION/MAINTENANCE										AVAILABLE SIZES							
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	4" x 12" x 5/8" 1.5 SF/PC Textured Finish Stone Dimensional Tile							
Ardex X77 White Microtec Fiber Reinforced Mortar ¹	Ardex FG-C Microtec Unsanded ²	1/16" Min.	Ardex 8 + 9	Ardex SX	Aquamix Sealers Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook	Refer to layout options	Required								
NOTES																	
¹ Alternate Setting Materials: Ardex 100% Solids Epoxy Adhesive White and Mapei Kerabond White w/Keralastic Additive. Recommended setting material for Fade Green Serpentine is Ardex 100% Solids Epoxy Adhesive White. ² Alternate Grout: Ardex DG 1 - One Component Grout and Mapei Keracolor Unsanded Tech Note: Product MUST be installed in accordance with current TCNA Handbook Stone Methods. Dry laying of the product prior to installation is required. Do not use color enhancer. The material should be carefully bag grouted. White mortar is recommended for natural stone. Seal and utilize a grout release prior to grouting.																	