


COTSWOLD



The Cotswold Collection is inspired by the charming villages and rolling hills of England's storied countryside. Once home to William Morris, who founded the Arts and Crafts Movement, the rural district features landscapes dotted with fairy tale homes and stone castles. Our two mosaic tile patterns—Cotswold Clover and Cotswold Octagon—pay tribute to the romantic region with their decorative shapes and tumbled finish. Clover's quatrefoil design echoes the ornamental windows of Gothic cathedrals, while Octagon's geometric form recalls the formal courtyards of country estates. The Cotswold Collection is stocked in Belgian Bluestone, Calacatta Gold, and Moca Limestone.




BELGIAN BLUESTONE



COTSWOLD CLOVER
Belgian Bluestone

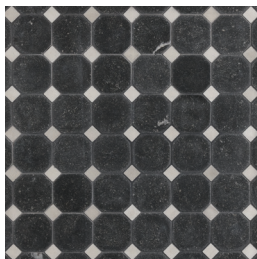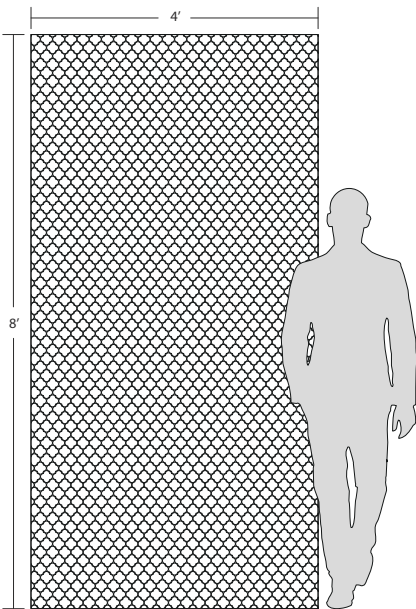

COTSWOLD OCTAGON
Belgian Bluestone

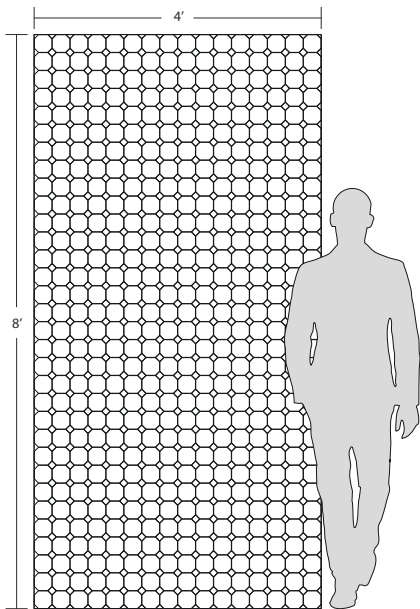


APPLICATIONS									VARIATION				TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1	V2	V3	V4	CARPET CUTTING	
Commercial Light/Medium	All	Yes, including steam	Yes, including steam ¹	No	Yes, non-freeze thaw	No	Yes	Yes					FIELD	
													FINISH	
													MOSAIC	
													SADDLE	
													VANITY TOP	
													WATERJET	
INSTALLATION/MAINTENANCE										AVAILABLE SIZES				
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	FLEXIBLE SEALANT	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT					
Ardex X77 White Microtec Fiber Reinforced Mortar ²	Ardex FG - C Microtec Unsanded ³	As established on sheets	Ardex 8 + 9	Ardex SX Silicone Sealant	Aquamix Sealers Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook	Maintain Sheet Orientation	Required					
NOTES ¹ Install with epoxy adhesive white ² Alternate Setting Materials: Ardex X5 White Medium Bed Mortar and Ardex 100% Solids Epoxy Adhesive White ³ Alternate Grouts: Ardex DG 1 – One Component Grout and Ardex WA Epoxy Tech Note: Product MUST be installed in accordance with current TCNA Handbook Stone Methods. Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. Dry laying of this product prior to installation is required. Massage joints when blending individual sheets. White mortar is recommended for natural stone. The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit or conduct adjustments throughout the installation. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. SHOWER FLOORS: Ardex 100% Solids Epoxy Adhesive White is recommended when installing this product in shower floor applications. See complete instructions for further details. Minor vein washout is possible in wet applications. Seal and utilize a grout release prior to grouting.														
										Cotswold Clover 11 1/4" X 12 1/4" X 3/8" Tumbled Stone Mosaic				
										Cotswold Octagon 12" X 12" X 3/8" Tumbled Stone Mosaic				


MOCA LIMESTONE



COTSWOLD CLOVER
Moca Limestone

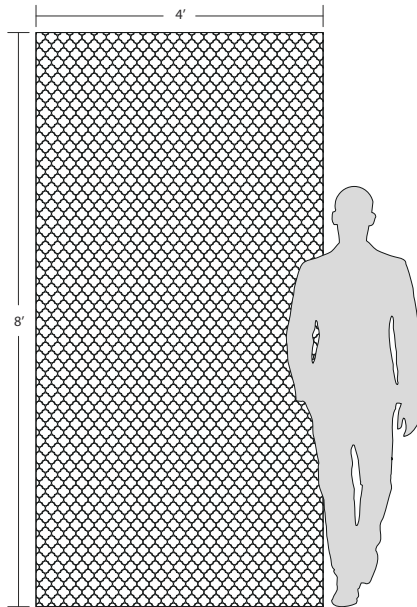


COTSWOLD OCTAGON
Moca Limestone

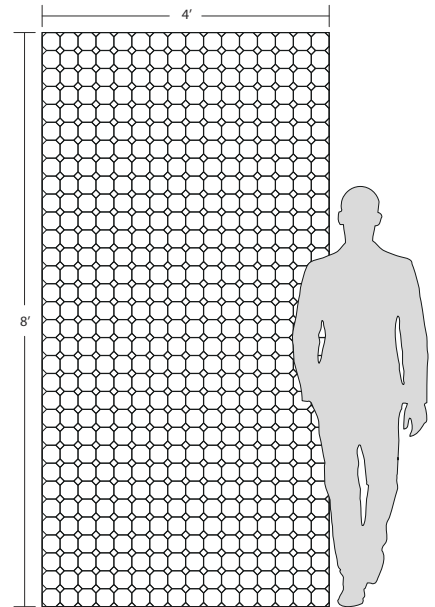


APPLICATIONS									VARIATION		TAILORED TO CUSTOMIZATION
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1	V2	CARPET CUTTING
Commercial Light/Medium	All	Yes, including steam	No	No	Yes, non-freeze thaw	No	Yes	Yes			FIELD
											FINISH
											MOSAIC
											SADDLE
											VANITY TOP
											WATERJET

INSTALLATION/MAINTENANCE										AVAILABLE SIZES	
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	FLEXIBLE SEALANT	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT		
Ardex N23 White Microtec Rapid Set ¹	Ardex FG - C Microtec Unsanded ²	As established on sheets	Ardex 8 + 9	Ardex SX Silicone Sealant	Fila MP90 Eco Plus	AquaMix Concentrated Cleaner	TCNA Handbook	Maintain Sheet Orientation	Required		

NOTES
¹ Alternate Setting Materials: Mapei Granirapid White 2-part System and Ardex 100% Solids Epoxy Adhesive White ² Alternate Grouts: Ardex FL Rapid Set Sanded and Mapei Ultracolor Plus FA Tech Note: Product MUST be installed in accordance with current TCNA Handbook Stone Methods. Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. Dry laying of this product prior to installation is required. Install with Ardex N23 Microtec Rapid Set White, Mapei Granirapid White 2-part System, or Ardex 100% Solids Epoxy Adhesive White. Do not install with organic adhesive or in areas of rising moisture. Consider the use of a waterproofing membrane when installing on a concrete slab. Check moisture level of concrete substrate prior to installation. White mortar is recommended for natural stone. Massage joints when blending individual sheets. The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit or conduct adjustments throughout the installation. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. Minor vein washout is possible in wet installations. Seal and utilize a grout release prior to grouting.



Cotswold Clover
11 1/4" X 12 1/4" X 3/8"
Tumbled Stone Mosaic




Cotswold Octagon
12" X 12" X 3/8"
Tumbled Stone Mosaic


CALACATTA GOLD



COTSWOLD CLOVER
Calacatta Gold

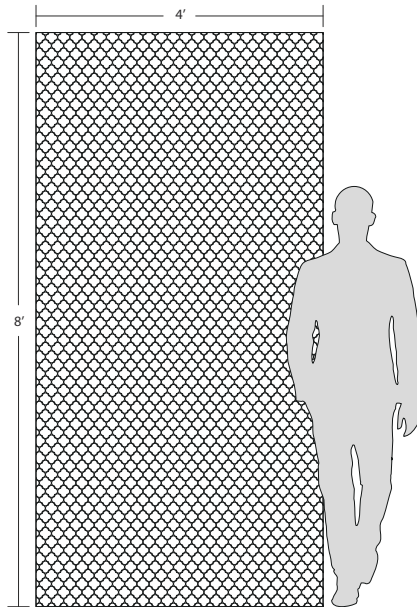

COTSWOLD OCTAGON
Calacatta Gold

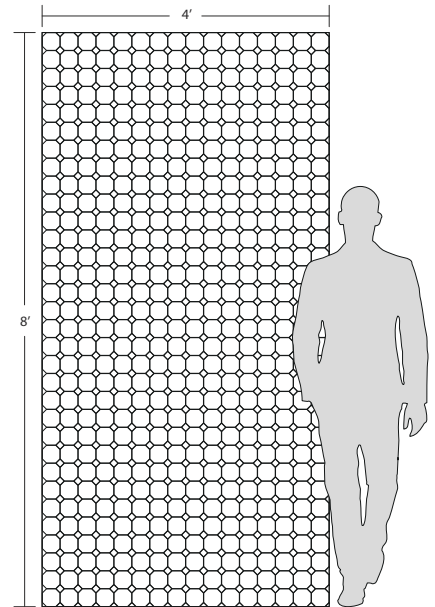

APPLICATIONS									VARIATION				TAILORED TO CUSTOMIZATION
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4				
Commercial Light/Medium	All	Yes, including steam	Yes, including steam ¹	No	Yes, non-freeze thaw	No	Yes	Yes					

INSTALLATION/MAINTENANCE										AVAILABLE SIZES	
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	FLEXIBLE SEALANT	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT		
Ardex X77 White Microtec Fiber Reinforced Mortar ²	Ardex FG - C Microtec Unsanded ³	As established on sheets	Ardex B + 9	Ardex SX Silicone Sealant	Aquamix Sealers Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook	Maintain Sheet Orientation	Required		Cotswold Clover 11 1/4" X 12 1/4" X 3/8"

NOTES
¹ Install with epoxy adhesive white ² Alternate Setting Materials: Ardex X4 White Tile & Stone Mortar and Ardex 100% Solids Epoxy Adhesive White ³ Alternate Grouts: Ardex DG 1 - One Component Grout and Ardex FL Rapid Set Sanded Tech Note: Product MUST be installed in accordance with current TCNA Handbook Stone Methods. SHOWER FLOORS: Ardex 100% Solids Epoxy Adhesive White is recommended for the installation of this product in shower floor applications. See complete install instructions for further details. Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. Dry laying of this product prior to installation is required. Massage joints when blending individual sheets. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. White mortar is recommended for natural stone. Seal and utilize a grout release prior to grouting.

 Cotswold Octagon 12" X 12" X 3/8" Tumbled Stone Mosaic
--