MOTOR CITY CIRCLES

Motor City Circles drives mosaic design into high gear. Natural stone forms concentric circles in varying tones, creating a pattern full of depth and movement. Polished to a soft glow, Vanilla Onyx brings creamy warmth. Bianco Dolomiti offers a crisp, refined look in classic polished white stone. Desert Sunset features tumbled stones in warm, dusky shades. Sand blends honed cream and taupe in a rich neutral palette, while Sky mixes icy blue, gray, and white in a velvety honed finish.




SHOWN: MOTOR CITY CIRCLES SAND

MOTOR CITY CIRCLES


SAND



Sand

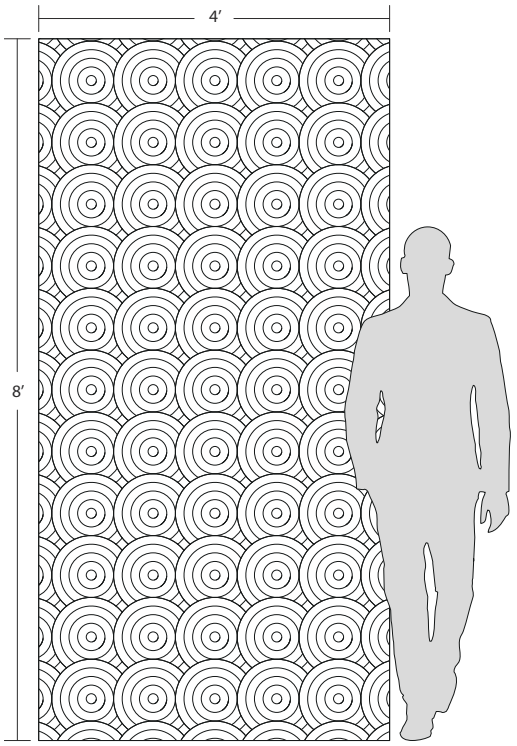

Straight Joint Layout

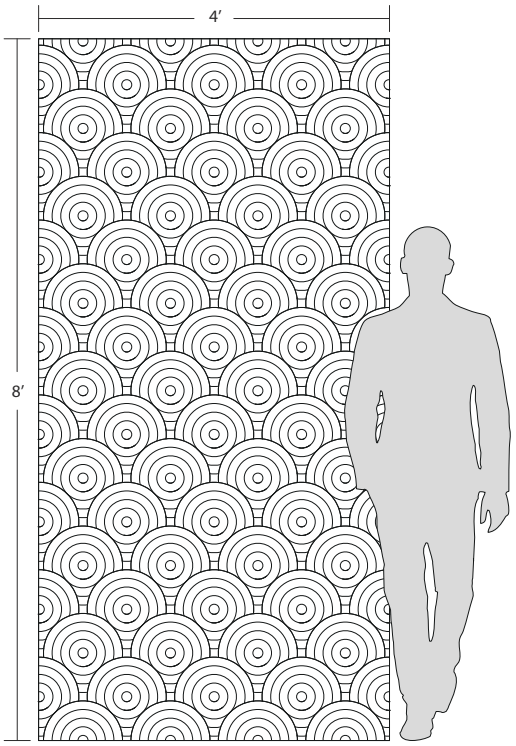


Broken Joint Layout

APPLICATIONS

INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND
Light / Medium Commercial	All	Convention-al Only	Yes, conventional only [1]	No	Yes, non-freeze thaw	No	Yes	Yes


VARIATION



INSTALLATION/MAINTENANCE

SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex N23 White Microtec Rapid Set [2]	Ardex FG-C Microtec Unsanded [3]	As established on sheets	Ardex 8+9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook	No	Required

MOSAIC

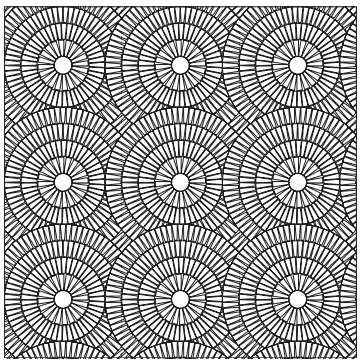

8-7/16" x 8-7/16" x 3/8"
0.49 SF/unit
Interlocking Sheet

Honed Stone Mosaic

NOTES

Product MUST be installed in accordance with current TCNA Handbook Stone Methods.
[1] Shower Floors: Ardex 100% Solids Epoxy Adhesive White is recommended for installing this product in shower floor applications. See complete install instructions for further details. Minor vein washout is possible in wet installations.
[2] Alternate Setting Materials: Ardex X77 White Microtec Fiber Reinforced Mortar, Ardex 100% Solids Epoxy Adhesive White
[3] Alternate Grout: Ardex DG 1 - One Component Grout, Ardex FL Rapid Set Sanded


Tech Note: Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. Dry laying of this product prior to installation is required. Massage joints when blending individual sheets. White mortar is recommended for natural stone. The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit or conduct adjustments throughout the installation. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. Seal and utilize a grout release prior to grouting.

MOTOR CITY CIRCLES


DESERT SUNSET



Desert Sunset

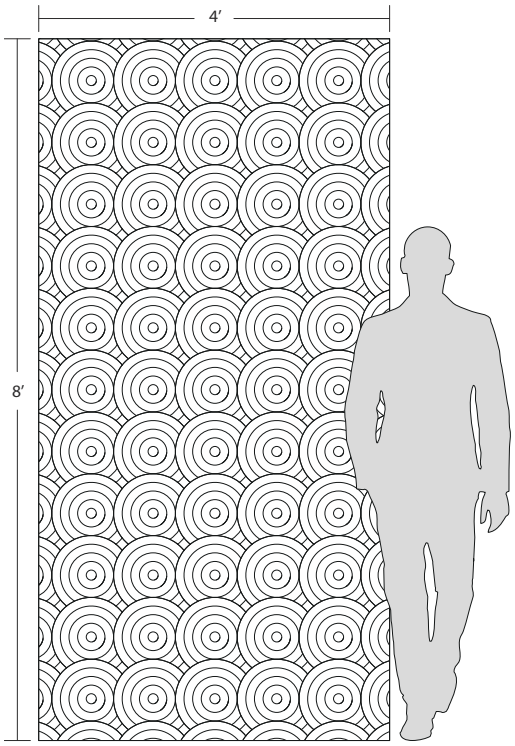

Straight Joint Layout

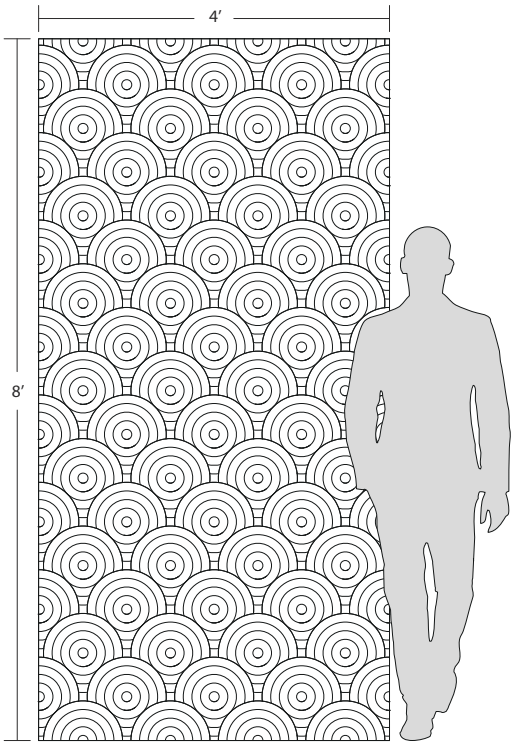


Broken Joint Layout

APPLICATIONS

INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND
Light / Medium Commercial	All	Conventional Only	No	No	Yes, non-freeze thaw	No	Yes	Yes

VARIATION



INSTALLATION/MAINTENANCE


SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex X77 White Microtec Fiber Reinforced Mortar [1]	Ardex FG-C Microtec Unsanded [2]	As established on sheets	Ardex 8+9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook	No	Required

NOTES

Product MUST be installed in accordance with current TCNA Handbook Stone Methods.
Minor vein washout is possible in wet installations.
[1] Alternate Setting Materials: Ardex X4 White Tile & Stone Mortar, Ardex 100% Solids Epoxy Adhesive White
[2] Alternate Grout: Ardex DG 1 - One Component Grout, Ardex FL Rapid Set Sanded

Tech Note: Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. Dry laying of this product prior to installation is required. Massage joints when blending individual sheets. White mortar is recommended for natural stone. The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit or conduct adjustments throughout the installation. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. Seal and utilize a grout release prior to grouting.

MOSAIC

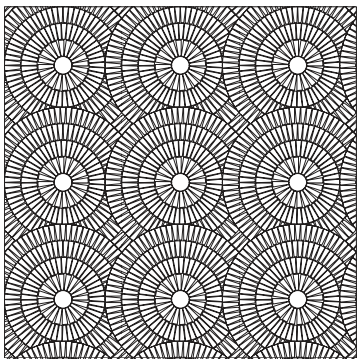


8-7/16" x 8-7/16" x 3/8"
0.49 SF/unit
Interlocking Sheet


Tumbled Stone Mosaic

MOTOR CITY CIRCLES


SKY

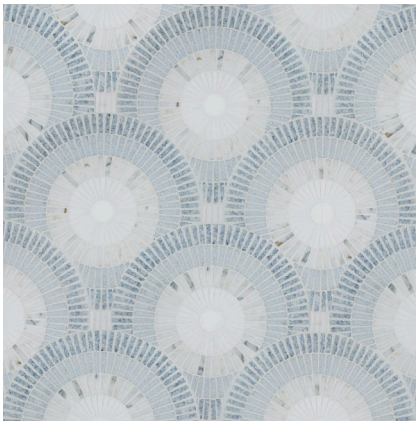

Sky

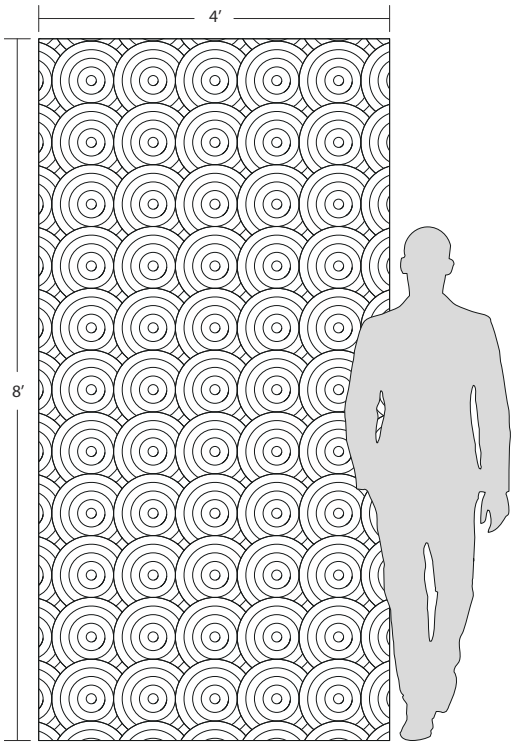

Straight Joint Layout

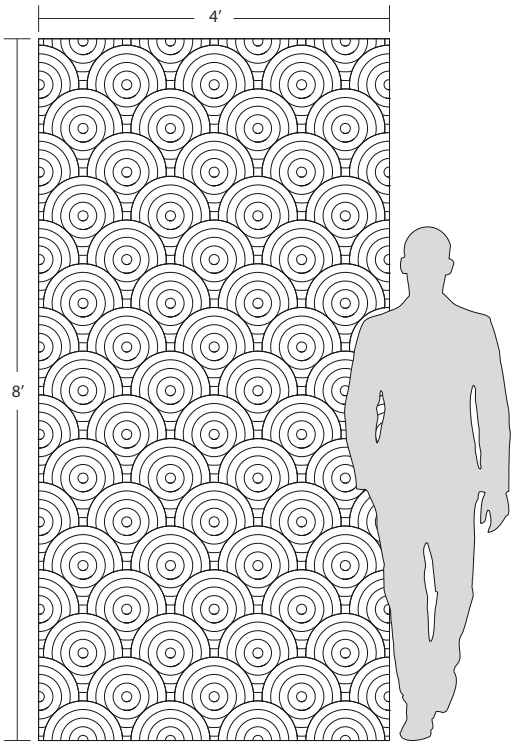


Broken Joint Layout

APPLICATIONS

INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND
Light / Medium Commercial	All	Conventional Only	Yes, conventional only [1]	No	Yes, non-freeze thaw	No	Yes	Yes


VARIATION



INSTALLATION/MAINTENANCE

SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex N23 White Microtec Rapid Set [2]	Ardex FG-C Microtec Unsanded [3]	As established on sheets	Ardex 8+9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook	No	Required

MOSAIC

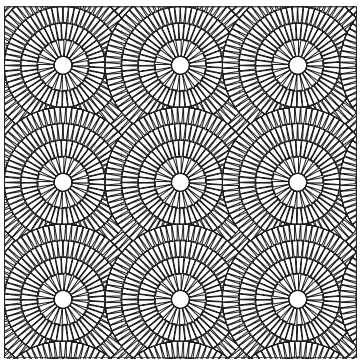

8-7/16" x 8-7/16" x 3/8"
0.49 SF/unit
Interlocking Sheet

Honed Stone Mosaic

NOTES

Product MUST be installed in accordance with current TCNA Handbook Stone Methods.
[1] Shower Floors: Ardex 100% Solids Epoxy Adhesive White is recommended for installing this product in shower floor applications. See complete install instructions for further details. Minor vein washout is possible in wet installations.
[2] Alternate Setting Materials: Ardex X77 White Microtec Fiber Reinforced Mortar, Ardex 100% Solids Epoxy Adhesive White
[3] Alternate Grout: Ardex DG 1 - One Component Grout, Ardex FL Rapid Set Sanded
Note: Due to the crystalline structure in the Azul Cielo and Sky Blue marbles, there will be some small chipping along the edges of some of these mosaic pieces.


Tech Note: Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. Dry laying of this product prior to installation is required. Massage joints when blending individual sheets. White mortar is recommended for natural stone. The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit or conduct adjustments throughout the installation. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. Seal and utilize a grout release prior to grouting.

MOTOR CITY CIRCLES


VANILLA ONYX



Vanilla Onyx

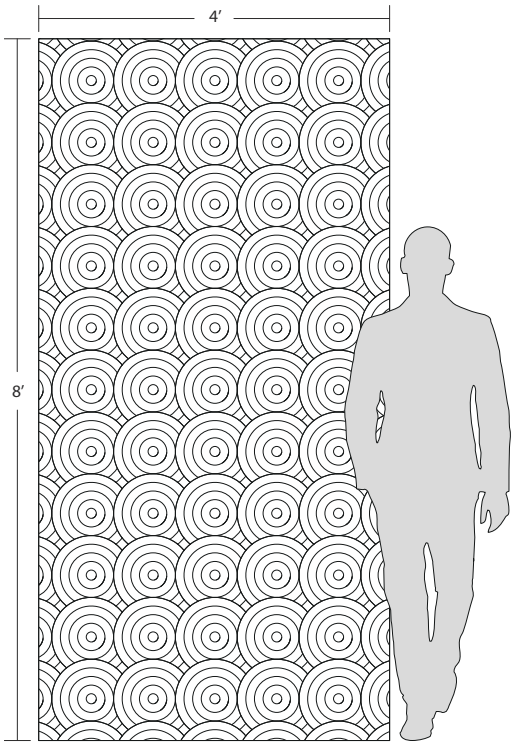

Straight Joint Layout

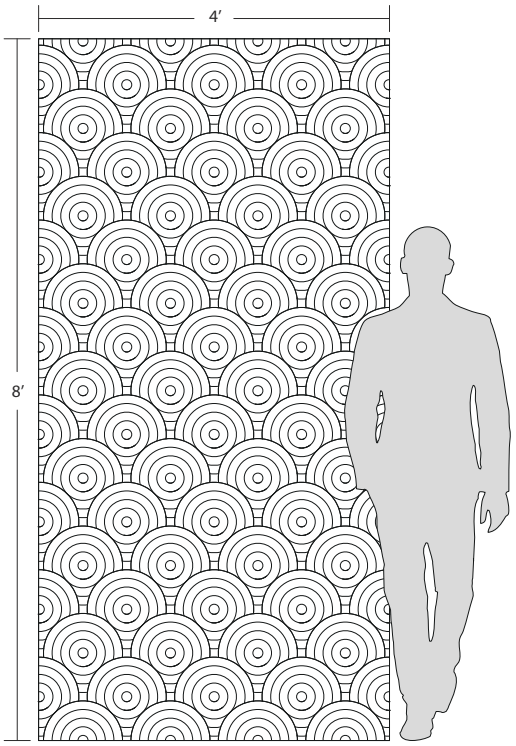


Broken Joint Layout

APPLICATIONS

INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND
Residential Light	All	Conventional only	Yes, conventional only [1]	No	No	No	No	Yes


VARIATION



INSTALLATION/MAINTENANCE

SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex X77 White Microtec Fiber Reinforced Mortar [2]	Ardex FG-C Microtec Unsanded [3]	As established on sheets	Ardex 8+9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook	No	Required

MOSAIC

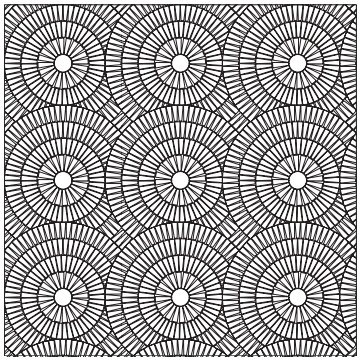

8-7/16" x 8-7/16" x 3/8"
0.49 SF/unit
Interlocking Sheet

Polished Stone Mosaic


NOTES

Product MUST be installed in accordance with current TCNA Handbook Stone Methods.
[1] Shower Floors: Ardex 100% Solids Epoxy Adhesive White is recommended for installing this product in shower floor applications. See complete install instructions for further details.
[2] Alternate Setting Materials: Ardex X4 White Tile & Stone Mortar, Ardex 100% Solids Epoxy Adhesive White
[3] Alternate Grout: Mapei Keracolor Unsanded, Ardex DG 1 - One Component Grout


Tech Note: Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. Dry laying of this product prior to installation is required. Massage joints when blending individual sheets. White mortar is recommended for natural stone. The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit or conduct adjustments throughout the installation. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. Seal and utilize a grout release prior to grouting.

MOTOR CITY CIRCLES


BIANCO DOLOMITI

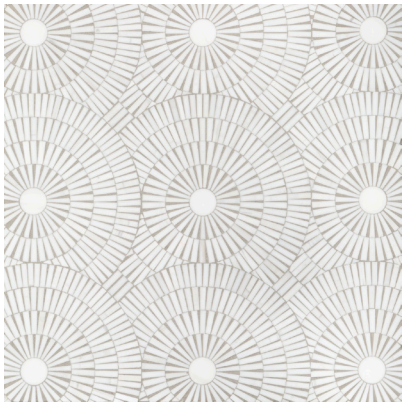

Bianco Dolomiti

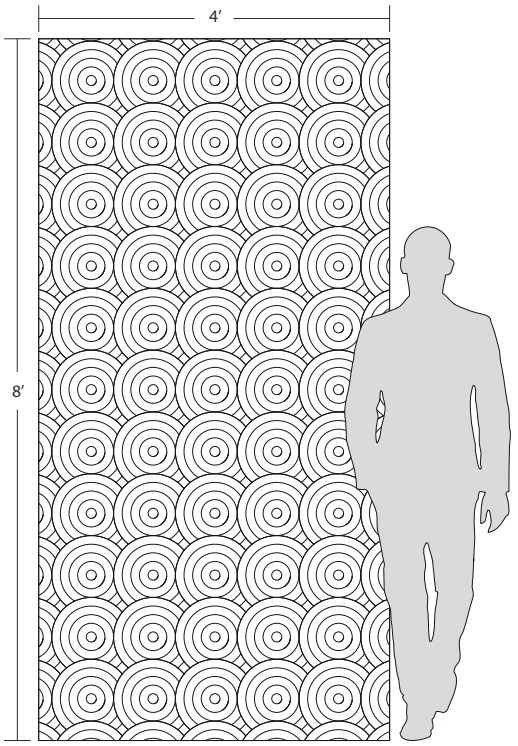

Straight Joint Layout

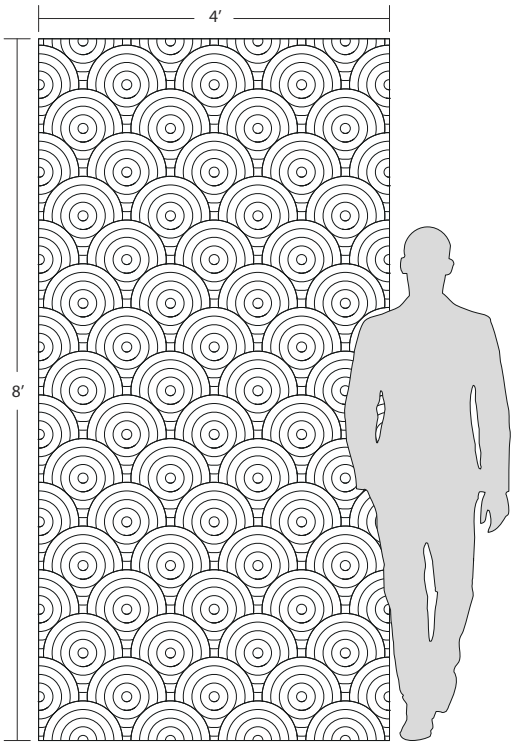


Broken Joint Layout

APPLICATIONS

INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND
Light / Medium Commercial	All	Yes, including steam	Yes, including steam [1]	No	Yes, non-freeze thaw	No	No	Yes


VARIATION



INSTALLATION/MAINTENANCE

SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex X77 White Microtec Fiber Reinforced Mortar [2]	Ardex FG-C Microtec Unsanded [3]	As established on sheets	Ardex 8+9	Ardex SX	AquaMix Sealer's Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook	No	Required

MOSAIC

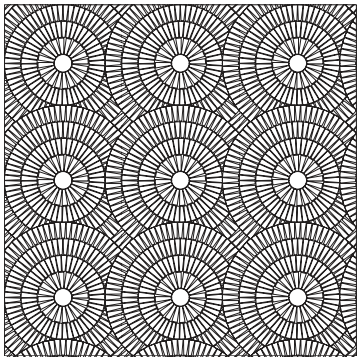

8-7/16" x 8-7/16" x 3/8"
0.49 SF/unit
Interlocking Sheet

Polished Stone Mosaic

NOTES

Product MUST be installed in accordance with current TCNA Handbook Stone Methods.
[1] Shower Floors: Ardex 100% Solids Epoxy Adhesive White is recommended for installing this product in shower floor applications. See complete install instructions for further details.
[2] Alternate Setting Materials: Ardex X4 White Tile & Stone Mortar, Ardex 100% Solids Epoxy Adhesive White
[3] Alternate Grout: Mapei Keracolor Unsanded, Ardex DG 1 - One Component Grout

Tech Note: Individual sheets of this mosaic are not square. Sheets are irregular and combine into a seamless interlocking pattern. Plan your layout accordingly. Dry laying of this product prior to installation is required. Massage joints when blending individual sheets. White mortar is recommended for natural stone. The installation of intricate mosaic patterns may require the use of a mosaic nipper to hand cut pieces along the edge to fit or conduct adjustments throughout the installation. For straight cuts on a tile wet saw clear plastic face tape can be applied to keep the mosaic pieces aligned while cutting. Seal and utilize a grout release prior to grouting.

SETTING NATURAL STONE MOSAICS ON A SHOWER FLOOR WITH ARDEX 100% SOLIDS EPOXY ADHESIVE WHITE

ARDEX 100% Solids Epoxy Adhesive White is suitable for each of the following installation methods shown in the Shower Receptors section in the most current edition of TCNA Handbook for Ceramic, Glass, and Stone Tile Installation.

B414-24 Stone, B441-24 Stone, B415-24 Stone, B420-24 Stone, B426-24 Stone, B431-24 Stone, B421-24 Stone, B422-24 Stone.

IMPORTANT NEXT STEPS:	IMPORTANT WATER CLEANUP STEPS
• Pour Part A (Resin) into Part B (Hardener) bucket and hand mix to achieve color blend. • Mix using a power mixer (approx. 650 RPM) for approx. 2 minutes. • Pour the entire mixture out of the bucket onto the floor or onto a scrap piece of tile. It is very important to get the entire mixture out of the bucket immediately. • Spread a thin layer of epoxy mortar with a flat trowel over a predetermined area of the shower floor. • Using a square notch trowel or a V-notch trowel, spread the epoxy mortar over the same predetermined shower floor area. • Next flatten out all trowel ridges with flat side of trowel striving to achieve 100% coverage over the predetermined shower floor area. • Place the interlocking mosaic sheets into mortar bed over the predetermined shower floor area for 100% coverage. • Tap down and level the mosaic sheets with a grout float over the predetermined area. • Allow mortar to set, harden, and cure.	• Wipe up any epoxy residue with sponges and clean water. • Note: No soap and no chemicals are needed. Just clean water. • Rinse sponges and change the water often. • Finally wipe with cool, clean water & clean sponges. • Use clean microfiber cloths for final wipe down.

Artistic Tile recommends sealing all natural stones before grouting.